

Retighten fastening bolts of bearing pins for lower control arm of front axle

922


Models 108 109 111 113

Tightening torque	Nm	(kpm)
Hex. bolts M 12 x 1.5 of bearing pins for lower control arms	130	(13)

Special tool	
Torque wrench 0–25 kpm	000 589 25 21 00 or conventional

- Check hex. bolts of bearing pins, left and right 4 each, for tight seat and retighten, if required.

Attention! Locked by means of snap ring. Do not loosen bolts.

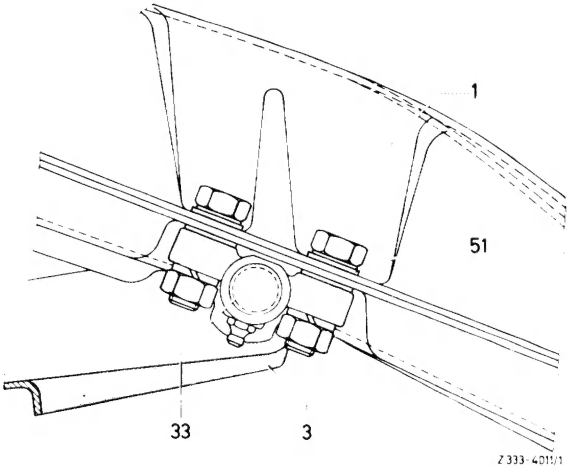

- | | |
|----------------------|----------------|
| 1 Front axle carrier | 33 Bearing pin |
| 3 Lower control arm | 51 Washer |

